

**FREE SPACE PATH LOSS FORMULATION FOR
TROPICAL REGION**

BY

ATIKAH BALQIS BINTI BASRI

A thesis submitted in fulfilment of the requirement for the
degree of Doctor of Philosophy (Engineering)

**Kulliyyah of Engineering
International Islamic University Malaysia**

JANUARY 2021

ABSTRACT

A link budget is a way of quantifying the link performance. In the design of wireless communications links between transmitter and receiver, issues of range and received signal quality are of critical importance to the system engineer. Link budget analysis accounts for all gains and losses in the communication link. FSPL is a factor to be considered in the link budget. Free Space Path Loss (FSPL) is the major menace to all propagation links regardless of operating frequency in the tropics during the clear sky. An adequate power margin is typically worked out in mitigating such a problem for the specific desired quality of service (QoS). However, the calculation is simple and straight forward, but the solution is not cheap. A signal fade margin can be computed, configured, and implemented to increase system availability. FSPL typically dictates the fade margin values. This effort correspondingly will help to reduce the greenhouse effect. In the case of clear sky attenuation, the value is much dependent on the atmospheric layer conditions and their compositions. For absolute Free Space, the signal loss is only dependent on distance and frequency. The effects of power, distance, and frequency were analyzed in this study to identify the most appropriate clear sky attenuation. The objectives can be achieved by designing, assembling, and carrying out an empirical experimental set up to evaluate FSPL values. This involved the process of verifying the variation between the free space path loss's theoretical and empirical values. The empirical experiment was conducted at Electromagnetic Compatibility (EMC) chamber at the Malaysian National Space Agency located at Banting Selangor. The development of revised formulation can Empirical. The clear sky conditions were confirmed using S-band (Terminal Doppler Weather Radar) TDWR reflectivity information acquired from the Malaysian Meteorology Department (MMD). Validation for the proposed revised FSPL equation using RazakSAT S-band (2.232 GHz) transmission signal data was furnished by the Malaysian National Space Agency (ANGKASA). By eliminating any possible signal variation due to atmospheric impairments (L_a) the RazakSAT processed received signal level can be considered. As a result, the revised free space path loss equation proposed a better FSPL value than the ITU-R proposed equation for RazakSAT received signal. The revise formulation is undoubtedly a significant improvement as compared to ITU-R estimation. This research will be valuable for future engineers in configuring the best communication establishment for satellite systems operating in the tropics.

خلاصة البحث

ميزانية الارتباط هي طريقة لقياس اداء الارتباط. في تصميم روابط الاتصالات اللاسلكية بين المرسل والمستقبل، تعتبر قضايا المدى وجودة الإشارة المستقبلية ذات أهمية حاسمة لمهندس النظام. ربط تحليل الميزانية بحسابات لجميع المكاسب والخسائر في ارتباط الاتصال. يعتبر برنامج FSPL عاملاً يجب مراعاته في ميزانية الارتباط. فقدان مسار الفضاء الحر (FSPL) هو الخطر الرئيسي لجميع روابط الانتشار بغض النظر عن تردد التشغيل في المناطق المدارية اثناء السماء الصافية. عادة ما يتم عمل هامش طاقة مناسب للتخفيف من مثل هذه المشكلة لجودة الخدمة المطاوية. ومع ذلك، فإن الحساب بسيط ومباشر، لكن الحل ليس رخيصاً. يمكن حساب هامش الإشارة وتكوينه وتنفيذه لزيادة توفر النظام. تحدد FSPL عادة قيم هامش الخبو. سيساعد هذا الجهد في المقابل علي تقييم تأثير الاحتباس الحراري. في حالة السماء الصافية، تعتمد القيمة الي حد كبير علي ظروف طبقة الغلاف الجوي وتركيباتها. بالنسبة للمساحة الحرة المطاوعة، تعتمد خسارة الإشارة فقط علي المسافة والتردد. تم تحليل تأثيرات القدرة والمسافة والتردد في هذه الدراسة لتحديد انسب فقد لتكون السماء الصافية. يمكن تحقيق الاهداف من خلال تصميم وتجميع وتنفيذ مجموعة تجريبية لتقييم قيم FSPL تضمن ذلك عملية التحقق من التباين بين القيم النظرية والتجريبية لخسارة مسار الفضاء الحر. اجريت التجربة التجريبية في غرفة التوافق الكهر و مغناطيسي (EMC) في وكالة الفضاء الوطنية الماليزية الواقعة في بانينج سيلانجور. يمكن ان يكون تطوير الصيغة المنقحة تجريبياً. تم تأكيد ظروف السماء الصافية باستخدام معلومات انعكاسية TDWR التي تم الحصول عليها من قسم الارصاد الجوية الماليزي (MMD) في النطاق S (رادار طقس دوبلر طرفي). تم التحقق من صحة معادلة FSPL المنقحة المقترحة باستخدام بيانات اشارة ارسال RazakSAT S-band (2.232 GHz) من قبل وكالة الفضاء الوطنية الماليزية (ANGKASA). من خلال القضاء علي اي تغيير محتمل للاشارة بسبب الاضطراب الجوي (La)، يمكن النظر في مستوى الإشارة المستقبلية التي تمت معالجتها بواسطة RazakSAT. ونتيجة لذلك، اقتر

حت معادلة خسارة مسير الفضاء الحر المنقحة قيمة (FSPL) افضل من المعادلة التي اقتر
حها قطاع الاتصالات الر اديوية للاشارة المستقبلية (RazakSAT) تعد صياغة المراجعة
بلا شك تحسنا هاما مقارنة بتقدير قطاع الاتصالات الر اديوية. سيكون هذا البحث ذا قيمة
لمهندسي المستقبل في تكوين افضل مؤسسة اتصالات لأنظمة الاقمار الصناعية العاملة في
المناطق المدارية



APPROVAL PAGE

The thesis of Atikah Balqis binti Basri has been approved by the following:

Khairayu Badron
Supervisor

Ahmad Fadzil Ismail
Co-Supervisor

Othman O. Khalifa
Internal Examiner

Aduwati Sali
External Examiner

Nor Hisham Khamis
External Examiner


Mohammad Naqib Eisan Jan
Chairman

DECLARATION

I hereby declare that this thesis is the result of my own investigations, except where otherwise stated. I also declare that it has not been previously or concurrently submitted as a whole for any other degrees at IIUM or other institutions.

Atikah Balqis binti Basri

Signature Date

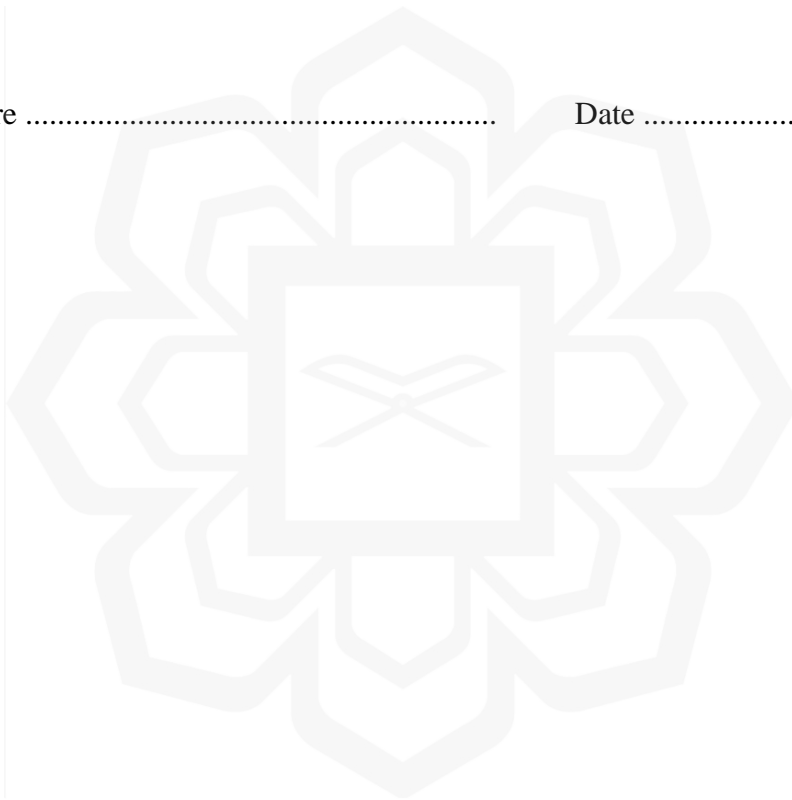

INTERNATIONAL ISLAMIC UNIVERSITY MALAYSIA

**DECLARATION OF COPYRIGHT AND AFFIRMATION OF
FAIR USE OF UNPUBLISHED RESEARCH**

**FREE SPACE PATH LOSS FORMULATION FOR TROPICAL
REGION**

I declare that the copyright holders of this thesis are jointly owned by the student and IIUM.

Copyright © 2021 Atikah Balqis binti Basri and International Islamic University Malaysia. All rights reserved.

No part of this unpublished research may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording or otherwise without prior written permission of the copyright holder except as provided below

1. Any material contained in or derived from this unpublished research may be used by others in their writing with due acknowledgement.
2. IIUM or its library will have the right to make and transmit copies (print or electronic) for institutional and academic purposes.
3. The IIUM library will have the right to make, store in a retrieved system and supply copies of this unpublished research if requested by other universities and research libraries.

By signing this form, I acknowledged that I have read and understand the IIUM Intellectual Property Right and Commercialization policy.

Affirmed by Atikah Balqis binti Basri

.....
Signature

.....
Date

ACKNOWLEDGEMENTS

All glory is due to Allah, the Almighty, whose Grace and Mercies have been with me throughout the duration of my program.

This work would not have been possible without the financial support of the Research Management Centre of the International Islamic University Malaysia (IIUM) and the Malaysian Ministry of Education. The reported research outcome is part of the deliverables for the research funded under IIUM's Research University Initiatives. This research is being sponsored under the Fundamental Research Grant Scheme (FRGS) Research Project by the Malaysian Ministry of Education.

The reported research outcome is part of the deliverables for the research funded under IIUM's Research University Initiatives. This research is being sponsored under the Fundamental Research Grant Scheme (FRGS) Research Project by the Malaysian Ministry of Education.

Next, it is my utmost pleasure to dedicate this work to my dear parents, husband, children and my family, who granted me the gift of their unwavering belief in my ability to accomplish this goal and prayers: thank you for your support and patience.

I wish to express my appreciation and thanks to those who provided their time, effort and support for this project. To the members of my dissertation committee, thank you for sticking with me.


Finally, a special thanks to Assistant Professor Dr Khairayu binti Badron and Professor Ir. Dr Ahmad Fadzil bin Ismail for their continuous support, encouragement and leadership, and for that, I will be forever grateful.

TABLE OF CONTENTS

Abstract	ii
Abstract in Arabic	iii
Approval Page.....	v
Declaration	vi
Copyright Page.....	vii
Acknowledgements	viii
List of Tables	xii
List of Figures	xiv
List of Abbreviations	xviii
List of Symbols	xix
CHAPTER ONE: INTRODUCTION	1
1.1 Overview	1
1.1.1 Fundamentals of Free-Space Path Loss (FSPL)	4
1.2 Problem Statement and Its Significance	6
1.3 Research Scope	8
1.4 Research Objectives	9
1.5 Research Hypotheses	10
1.6 Research Methodology.....	10
1.7 Research Philosophy	14
1.8 Thesis Organization	15
1.9 Contribution of Research Data.....	16
CHAPTER TWO: THEORETICAL BACKGROUND.....	17
2.1 Introduction	17
2.2 RazakSAT	17
2.3 Wireless Technology.....	18
2.4 Link Budget.....	19
2.5 Loss in Free Space	22
2.6 FSPL Revised Formulation.....	25
2.6.1 Antenna Specification.....	29
2.7 Determine Atmospheric Impairments (L_a) From Propagation Measurement	31
2.7.1 Modification of Friss Equation.....	33
2.7.2 Propagation Loss	33
2.7.3 Attenuation by Atmospheric Gases	34
2.7.4 Attenuation by Ionospheric Absorption	34
2.7.5 Attenuation by Precipitation and Clouds.....	36
2.7.5.1 Radar	39
2.7.6 Scintillation.....	40
2.8 Chapter Summary.....	42

CHAPTER THREE: RESEARCH METHODOLOGY	43
3.1 Introduction	43
3.2 Chapter Review	43
3.3 Terrestrial Link in EMC Chamber	45
3.3.1 The Empirical Experiment Set Up.....	45
3.3.2 Assemble and Carry Out Empirical Experiment Set Up	50
3.3.3 Identify Variation Between Theoretical and Experimental	52
3.3.4 Formation of FSPL Model.....	53
3.4 Method on Extracting Fspl on A Space-Earth Link.....	55
3.4.1 Acquired the Razaksat and Radar Data	55
3.4.1.1 RazakSAT Data Collection.....	55
3.4.1.1.1 Distance Configuration for LEO satellite.....	58
3.4.1.1.2 Radar Data Collection.....	60
3.4.2 Identification of Clear Sky Loss Values During Day and Night for a Satellite Transmission	61
3.4.3 Determine Atmospheric Impairments (L_a) from Propagation Measurement	63
3.4.3.1 Attenuation by Atmospheric Gases	63
3.4.3.2 Attenuation by Ionospheric Absorption.....	64
3.4.3.3 Attenuation by Precipitation and Clouds	64
3.4.3.4 Attenuation by Scintillation	69
3.4.4 Validate the Proposed Revised Free Space Path Loss Equation Using Razaksat Satellite Data at S-Band.....	70
3.5 Chapter Summary.....	71
CHAPTER FOUR: RESULTS AND FINDINGS.....	72
4.1 Introduction	72
4.2 Background Studies	72
4.3 Terrestrial Link in EMC Chamber	73
4.3.1 Designing the Empirical Experiment Set up	73
4.3.2 Assembled and Carried out Empirical Experiment Set up	77
4.3.2.1 Calculated Cable Loss	83
4.3.3 Identified Variation Between Theoretical and Experimental	85
4.3.4 Revised FSPL Model Formulated	94
4.4 Extracted FSPL on A Space-Earth Link	99
4.4.1 Acquired the Razaksat and Radar Data	99
4.4.1.1 Determined Received Signal Level of RazakSAT	99
4.4.1.1.1 Distance Configuration for LEO Satellite.....	101
4.4.1.1.2 Evidences of Clear Sky Condition Using Radar Data	105
4.4.2 Identified the Variation of Clear Sky Values During Night and Day for a Razaksat Transmission	108
4.4.2.1 Days	108
4.4.2.2 Nights.....	113
4.4.3 Determined Atmospheric Impairments (L_a) from Propagation Measurement	118
4.4.3.1 Attenuation by Atmospheric Gases	119
4.4.3.2 Attenuation by Ionospheric Absorption.....	122
4.4.3.3 Attenuation by Precipitation and Clouds	124
4.4.3.4 Attenuation by Scintillation	125

4.4.3.5 Defocusing Losses	127
4.4.4 Validated Proposed Revised Free Space Path Loss Equation using Razaksat Satellite Data at S-Band.....	127
4.4.4.1 RazakSAT Link Budget for Processed Received Signal Level	128
4.5 Chapter Summary.....	134
CHAPTER FIVE: CONCLUSION AND RECOMMENDATIONS	135
5.1 Discussion and Conclusion	135
5.2 Limitations	139
5.3 Future Works and Recommendations	139
REFERENCES.....	142
LIST OF PUBLICATIONS	148
APPENDIX A MOU between IIUM and ANGKASA	149

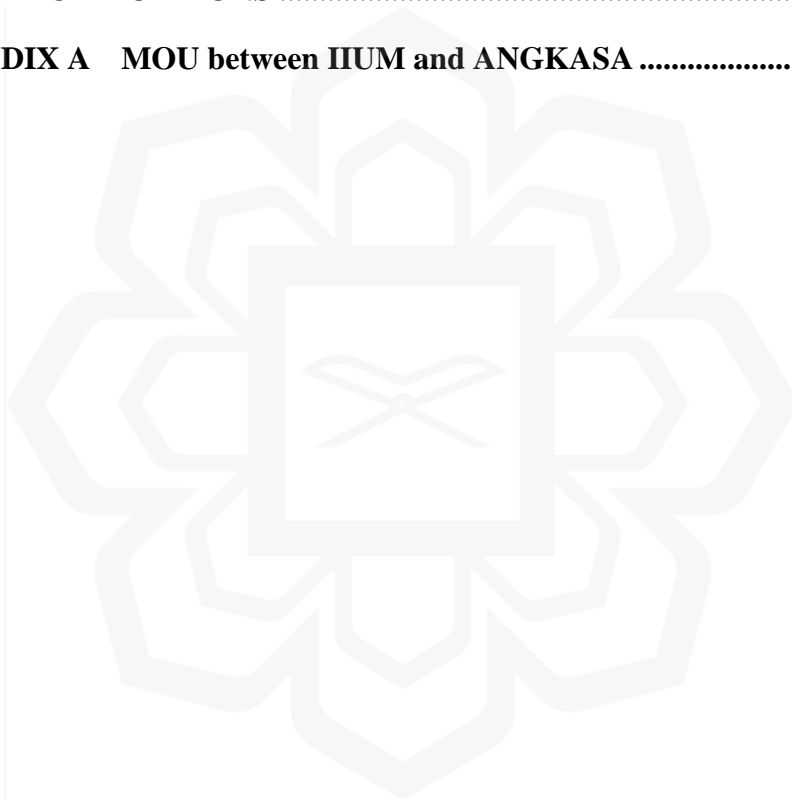

LIST OF TABLES

Table 2.1	A summary on the related work on Link Budget Analysis for Satellite System from the Previous Researcher	21
Table 2.2	A summary of the Path loss analyses for the Indoor Environment from the Previous Researcher	28
Table 2.3	The Concentration, Liquid Water Content, and Droplet Diameter for a Range of Typical Cloud Types	39
Table 3.1	Antenna Model	46
Table 3.2	Antenna Specifications	47
Table 3.3	Specific Antenna Gain	47
Table 3.4	Tabulation of Collected data (Theoretical)	53
Table 3.5	TDW Radar and Satellite Earth Station Location and Displacement.	55
Table 3.6	Empirical Conversion Table for Scintillation Indices	70
Table 4.1	S_{11} Value for Each Antenna Use	74
Table 4.2	S_{11} Value for each Frequency Band for Doppel Steg Horn HF 906 Antenna	74
Table 4.3	Reflection Coefficient and VSWR Value for Doppel Steg Horn (HF) 906 (1-18 GHz)	77
Table 4.4	Reflection Coefficient and VSWR Value for Selection of Receive Antenna	77
Table 4.5	Measurement Readings for 1 Meter Distance	78
Table 4.6	Measurement Readings for 3 Meter Distance	79
Table 4.7	Measurement Readings for 5 Meter Distance	81
Table 4.8	Measurement Readings for 8 Meter Distance	82
Table 4.9	Cable Loss	84
Table 4.10	Empirical Experimental Result for S-band (2.2321GHz)	86
Table 4.11	Empirical Experimental Result for S-band (3.753 GHz)	87

Table 4.12	Empirical Experimental Result for C-band (4.185 GHz)	88
Table 4.13	Empirical Experimental Result for C-band (6.057 GHz)	89
Table 4.14	Empirical Experimental Result for X-band (8.1805 GHz)	90
Table 4.15	Empirical Experimental Result for X-band (9.019 GHz)	91
Table 4.16	Empirical Experimental Result for Ka-band (12.201GHz)	92
Table 4.17	Empirical Experimental Result for Ka-band (14.685GHz)	93
Table 4.18	Coefficients Values	100
Table 4.19	Values Conversion for RazakSAT S-band Received Signal Value (15/7/2009)	101
Table 4.20	RazakSAT Satellites Distance at Different Time	103
Table 4.21	Sample of Tabulation of Distance at Given Time on 16/7/2009	109
Table 4.22	Sample of Tabulation of RazakSAT Received Signal at Given Time on 16/7/2009	111
Table 4.23	Tabulation of Distance at Given Time on 04/8/2009	114
Table 4.24	Tabulation of RazakSAT Received Signal at Given Time on 04/8/2009	116
Table 4.25	Tabulation of RazakSAT Atmospheric Gaseous Attenuation at Given Time 16/07/2009	121
Table 4.26	Sample Tabulation of RazakSAT Atmospheric Gaseous Attenuation at Given Time on 16/07/2009	123
Table 4.27	RazakSAT Mission Link Budget in the Space-Earth Direction, Different Orbital Distance Case	128
Table 4.28	Estimated FSPL at the Selected Distance	129

LIST OF FIGURES

Figure 1.1	Schematic Diagram of Satellite Uplink and Downlink System (Tato, A. 2018)	1
Figure 1.2	Microwave Propagation Scenario (Chaturvedi P.K.,2018)	3
Figure 1.3	Flowchart of the Research	12
Figure 1.4	Flowchart of Research Activities	13
Figure 2.1	RazakSAT Satellite. SI, ATSB (n.d) Retrieved from https://directory.eoportal.org/web/eoportal/satellite-missions/r/razaksat	18
Figure 2.2	Free Space Losses as Functions of Frequency and Distance (Ho et al., 2004).	32
Figure 2.3	Schematic representation of the Earth's Atmosphere	35
Figure 2.4	Day and Night Structure of the Ionosphere	36
Figure 3.1	Flowchart of Research Activities	44
Figure 3.2	Basic Radio Wave System	45
Figure 3.3	Setup for Determining the Reflection Coefficient of the Antennas TX Doppel Steg Horn (HF) 906	48
Figure 3.4	Setup for Determining the Reflection Coefficient of the Antennas AT4004	48
Figure 3.5	Cable use during Measurement.	49
Figure 3.6	Displays the Make-up of the EMC Chamber	49
Figure 3.7	Schematic of the Measurement Setup	50
Figure 3.8	Measurement Outline	51
Figure 3.9	Measurement Scenario	51
Figure 3.10	Example of Collected Data (Empirical)	52
Figure 3.11	Graph of Collected Data (Theoretical)	53
Figure 3.12	RazakSAT Satellite Data in Excel Format	56
Figure 3.13	RazakSAT S-band Received Signal Value (15/7/2009)	57

Figure 3.14	Setup for Power Received Measurement	58
Figure 3.15	Location of Transmitter and Receiver	58
Figure 3.16	RazakSAT Satellites Motion	59
Figure 3.17	Example of CAPPI View above the Ground Station	61
Figure 3.18	RazakSAT Satellite Motion for Days	62
Figure 3.19	RazakSAT Satellite Motion for Nights	62
Figure 3.20	Example of CAPPI View above the Ground Station	65
Figure 3.21	VMware Server	66
Figure 3.22	Linux Operating System using CentOS	66
Figure 3.23	Flow Diagram for Product Generation	67
Figure 3.24	Choosing File for Inputting and Ingesting Raw Data	67
Figure 3.25	Iris Vaisala Software	68
Figure 3.26	ProductX Information	68
Figure 3.27	GISM Web Interface	69
Figure 3.28	Example of D Value	71
Figure 4.1	S_{11} Results for Doppel Steg Horn HF 906 (1-18 GHz)	75
Figure 4.2	S_{11} Results for Antenna AT 4510	75
Figure 4.3	S_{11} Results for Antenna AT 4004	76
Figure 4.4	S_{11} Results for Antenna AT 4003A	76
Figure 4.5	Received Power versus the Transmit Power for Distance = 1 meter	79
Figure 4.6	Received Power versus the Transmit Power for Distance = 3 meter	80
Figure 4.7	Received Power versus the Transmit Power for Distance = 5 meter	82
Figure 4.8	Received Power versus the Transmit Power for Distance = 8 meter	83
Figure 4.9	Cable use during Measurement.	84

Figure 4.10	Empirical Experimental Result for S-band (2.2321GHz)	86
Figure 4.11	Empirical Experimental Result for S-band (3.753 GHz)	87
Figure 4.12	Empirical Experimental result for C-band (4.185 GHz)	88
Figure 4.13	Empirical Experimental Result for C-band (6.057 GHz)	89
Figure 4.14	Empirical Experimental Result for X-band (8.1805 GHz)	90
Figure 4.15	Empirical Experimental Result for X-band (9.019 GHz)	91
Figure 4.16	Empirical Experimental Result for Ka-band (12.201GHz)	92
Figure 4.17	Empirical Experimental Result for Ka-band (14.685GHz)	93
Figure 4.18	Experimental Values and Theoretical Values	95
Figure 4.19	Best Fitting for the formulation	96
Figure 4.20	Logarithm Function of Log3P1	97
Figure 4.21	Free Space Path Loss Model	98
Figure 4.22	Weibull Probability for the Newly Revised Formula	99
Figure 4.23	The Correlation Coefficient for RazakSAT S-band Received Signal Value	100
Figure 4.24	Conversion for RazakSAT S-band Received Signal Value (15/7/2009)	101
Figure 4.25	RazakSAT Satellites Motion	102
Figure 4.26	RazakSAT Satellites Distance Calculations	103
Figure 4.27	Location of RazakSAT at 3:21:00	104
Figure 4.28	Location of RazakSAT at 3:14:17	104
Figure 4.29	RazakSAT Maximum Distance and Elevation	105
Figure 4.30	CAPPI View above the Ground Station at 11:36:41	106
Figure 4.31	RHI View above the Ground Station at 11:36:41	106
Figure 4.32	CAPPI View above the Ground Station at 3:13:44	107
Figure 4.33	RHI View above the Ground Station at 3:13:44	107
Figure 4.34	RazakSAT Satellite Motion	108

Figure 4.35	Graph Distance against Time	109
Figure 4.36	Power Signal Values against Time	110
Figure 4.37	Best-fit Plot for Received Signal and Distance	112
Figure 4.38	Best-fit plot for Clear Sky Loss Calculated and FSPL Theoretical	113
Figure 4.39	RazakSAT Satellite Motion for Nights	114
Figure 4.40	Best-fit Plot for Received Signal and Distance	114
Figure 4.41	Received Power Signal against Distance	116
Figure 4.42	Best-fit Plot for Received Signal and Distance	117
Figure 4.43	Best-fit Plot for Received Signal and Distance	118
Figure 4.44	Calculation of Atmospheric Gaseous Attenuation using Formula in Excel	121
Figure 4.45	Calculation of Ionospheric Attenuation using Formula in Excel	123
Figure 4.46	CAPPI view above the Ground Station at 03:13:44	124
Figure 4.47	RHI view above the Ground Station at 03:13:44	125
Figure 4.48	GISM Web Interface Scintillation Result	125
Figure 4.49	GISM Web Interface Scintillation Result	126
Figure 4.50	GISM Web Interface Scintillation Result	126
Figure 4.51	Plot of FSPL for Processed Collected Data, Theoretical, and Newly Revised Formulation for Days Conditions	130
Figure 4.52	Plot of FSPL for Processed Collected Data, Theoretical, and Newly Revised Formulation for Night Conditions	131
Figure 4.53	Two-Sample Kolmogorov-Smirnov Test Result for FSPL (Newly Revised Formulation)	132
Figure 4.54	Two-Sample Kolmogorov-Smirnov Test Result for FSPL (ITU-R)	133

LIST OF ABBREVIATIONS

ANGKASA	Malaysian National Space Agency
CAPPI	Constant Altitude Plan Position Indicator
dBZ	Decibel Relative to Z
EMC	Electromagnetic Compatibility
FSPL	Free Space Path Loss
GISM	Global Ionospheric Scintillation Model
IUM	International Islamic University Malaysia
ITU-R	Radiocommunication Sector
KLIA	Kuala Lumpur International Airport
La	Atmospheric Impairments
LEO	Low Earth Orbit
MAE	Mean Absolute Error
MMD	Malaysian Meteorology Department
QoS	Quality of Service
RMSE	Root Mean Square Error
SDE	Standard Deviation Error
TDWR	Terminal Doppler Weather Radar
VNA	Vector Network Analyser
VSWR	Voltage Standing Wave Ratio
Z/R	Reflectivity-Rainfall Rate
3-D	Three Dimensional

LIST OF SYMBOLS

- θ Elevation
 $^{\circ}$ Degree



CHAPTER ONE

INTRODUCTION

1.1 OVERVIEW

In today's worldwide communication service scenario, it is observed that services providing voice, data, and video are increasingly merged and delivered to devices that are expected to be used at anytime and anywhere. At present, the satellite industry seems to play a vital role in providing telecommunication services even when they are facing stiff competition from terrestrial service providers. Satellite is a self-contained communication system with the ability to receive and transmit signals from Earth to satellite and vice versa via the transponder. The two essential elements of a satellite communication system, as shown in Figure 1.1 are the space segment comprising the spacecraft and flight mechanism; and the other, the ground segment of Earth station and network control centre of the entire satellite system.

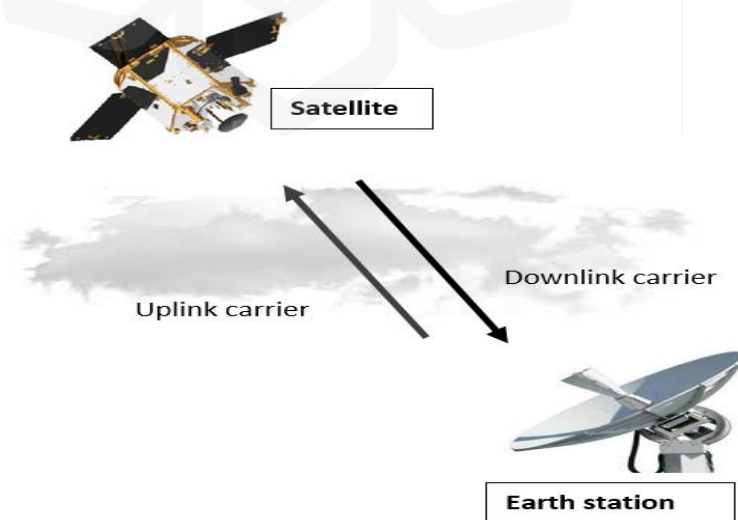


Figure 1.1 Schematic Diagram of Satellite Uplink and Downlink System (Tato, A. 2018)

Today, Low Earth Orbit (LEO), Medium Earth Orbit (MEO), and Geostationary Earth Orbit (GEO) continue to be the members among the hundreds of operational telecommunications satellites. The operating frequency bands of satellites are typically recognized by letter: L, S, C, X, Ku, Ka, and V. Larger antennas are needed to receive and transmit microwave signals at lower band frequencies (L-band, S-band, and C-band). Operations in the higher end of the frequency spectrum like X-band, Ku-band, Ka-band, and V-band sanctioned the use of smaller receiver dishes with size less than the one-meter diameter. Today's increasing demand for video, voice, and data traffic that requires more substantial amounts of bandwidth will drive the satellite services to operate at higher frequency bands. It is crucial to determine as accurately possible the power margins requirements as the frequency increases. It is also necessary to identify as detailed possible all propagation variances to be experienced at the frequency range of interest.

On such note, the atmospheric and weather effects on frequency bands between 3–30 GHz become significant. They are no longer negligible as compared to those at the lower frequency bands 3 GHz and below. There are mainly two dominant types of attenuation that dictate the power margin requirement for such high-frequency links. One is the atmospheric gaseous absorption, while another is the rain attenuation when microwave signals pass through the rain. Other environmental phenomena, such as cloud, fog, ice, snow, aerosol, and dust can also cause critical signal impairment as operating frequency increases. Several anomalous propagation modes (such as ducting and tropospheric scatter) may also play significant roles in the trans-horizon interference for a tiny percentage of the time. At a low elevation angle, the atmospheric scintillation and multipath fading will become significant. A microwave propagation

scenario through the atmospheric medium experienced by an LEO satellite, i.e. RazakSAT, Malaysian owned satellite, operated in 2009 is shown in Figure 1.2

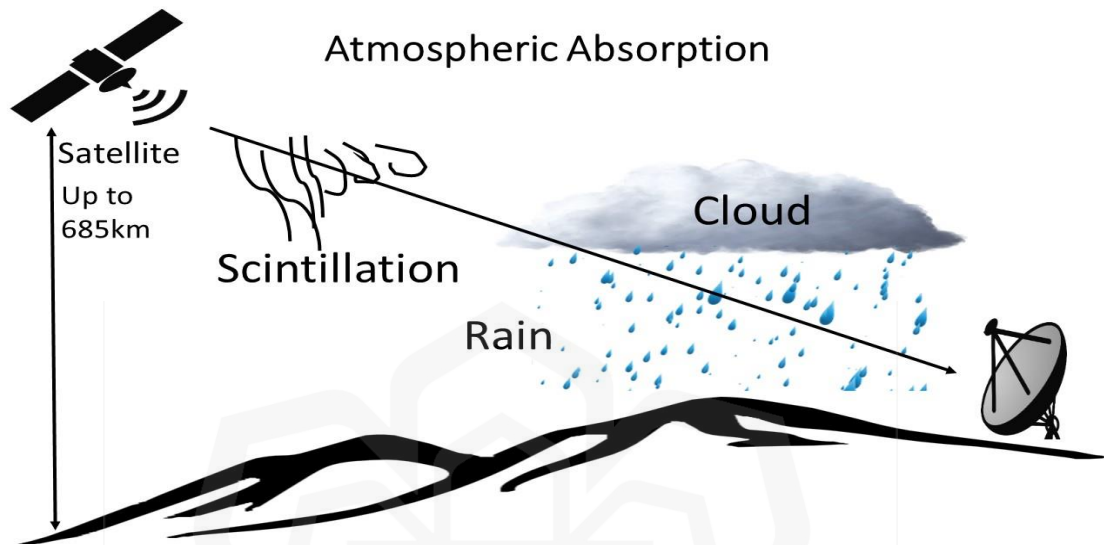


Figure 1.2 Microwave Propagation Scenario (Chaturvedi P.K.,2018)

As depicted in the figure, atmospheric absorption, clouds, fog, precipitation, and scintillation instigate energy losses in the transmitted signal. These losses can be deemed negligible at the lower frequencies, for instance, in the case of L-band link. As the frequency increases, such an assumption can no longer be acceptable. It is necessary to identify all the propagation mechanisms and estimate attenuation that might arise in the higher frequency bands.

The challenge is more evident in Equatorial and Tropical regions where high rainfall rates are more common. When the frequencies increase, the propagation signal will experience higher energy reduction due to higher absorption rate when passing through intense rain events as when compared to lower frequencies. In Malaysia, it is more common to classify the condition as wet and dry. The conditions experienced by orbiting satellites in the space above Malaysia fluctuate in terms of time, length of

occurrence, and severity. The phenomenon where signal amplitude reduction, which is only due to increases in distance and frequency in a vacuum (free space) is defined as Free Space Path Loss (FSPL). Increasing the distance and frequency cause higher signal attenuation, thus degrade the reliability and performance of the system. To mitigate such circumstance, the link margin for the service has to be properly configured. The knowledge of the potential variation of system performance due to propagation effects that may occur at any time interval is indeed crucial. More detailed information is required to develop a better system such as the possible or potential impairments to be encountered on the satellite-Earth link. This is to make sure that the design incorporates sufficient system gain or sensitivity to accommodate expected fading, to ensure that the required quality of service is maintained.

1.1.1 Fundamentals of Free-Space Path Loss (FSPL)

In telecommunication, Free-Space Path Loss (FSPL) is the loss in signal strength of an electromagnetic wave that would result from a line-of-sight path through free space, with no obstacles nearby to cause reflection or diffraction. It does not include factors such as the gain of the antennas used at the transmitter and receiver, nor any loss associated with hardware imperfections.

FSPL is proportional to the square of the distance between the transmitter and receiver, and also proportional to the square of the frequency of the radio signal. The signals do disperse over distances. For satellite communication, this is the primary cause of signal attenuation or impairment. Transmitted signal attenuates over distance because the signal is being spread over a longer expanse. This form of attenuation is expressed in terms of the ratio of the radiated power to the power received by the antenna or, in decibels, by taking 10 times the log of that ratio.

$$FSPL (dB) = 20 \text{ Log} \left(\frac{4\pi d}{\lambda} \right) \quad (1.1)$$

$$\text{Where: } \lambda = \frac{c}{f} \quad (1.2)$$

For an ideal isotropic antenna, FSPL is typically denoted as Equation 1.1 where: λ is the signal wavelength (in meters), f is the signal frequency (in hertz), d is the distance from the transmitter (in meters), and c in Equation 1.2 is the speed of light in a vacuum.

Thus, for the same antenna dimensions and separation, the shorter the carrier wavelength (the higher the carrier frequency), the higher would be the FSPL value. The equation indicates that as the frequency increases, the FSPL value also increases and becomes more burdensome. However, the equation shows that the increased loss can be compensated with antenna gains. The increase in distance and frequency results in an increased loss measured as outlined in Equation 1.3.

$$FSPL(dB) = 20 \log_{10} d + 20 \log_{10} f + 32.4 \quad (1.3)$$

Where: d = distance (km)

f = frequency (MHz)

(ITU-R P.525-3, 2016)

Looking into the future, expanding communication requirements will lead to frequency spectrum congestion (Chaves et al. 2015). Theoretically, this path attenuation is the dominant factor that limits the use of higher frequency for a Line of Sight (LoS) microwave links and satellite communication links in Malaysia. Malaysian engineers must be aware that the integrity of the microwave systems that had been designed for use in countries with temperate climate may not be capable of adapting conditions in