

CONVECTION FLOW OF MICROPOLAR FLUID OVER  
A FLAT SURFACE OF ANOTHER QUIESCENT FLUID

BY

NURAZLEEN ABDUL MAJID

A thesis submitted in fulfilment of the requirement for the  
degree of Master of Science (Computational & Theoretical  
Sciences)

Kulliyyah of Science  
International Islamic University Malaysia

AUGUST 2021

## ABSTRACT

Micropolar fluid is well known due to numerous applications such as paint, blood, liquid crystal, silicon oil and human fluids. This fluid can be defined as a fluid that contained microstructure and capable to solve fluid phenomena involving microstructure that cannot be explained by classical Navier- Stokes equation. In practical, many situations are involving two fluids with difference density such as sea water intrusion, air flow on top of water and oil spill over water occur. Despite the significance, the literature produced are still limited. Therefore, this thesis is intended to fill the research gap. Consider a lighter density of micropolar fluid is impinging orthogonally on a stretching surface of another heavier density of micropolar fluid. To solve this problem, system of dimensionless governing equations which consists of continuity, momentum, angular momentum and energy undergo scaling analysis to become dimensionless system of governing equations. Later, the similarity transformation is used to obtain the system of nonlinear ordinary differential equations and solved using shooting technique with Runge - Kutta - Gill method. The algorithm is implemented in Jupyter Notebook using Python 3 language. It is found that the result is in very good agreement with the previous work. The numerical results acquired are velocity, microrotation, temperature, skin friction and Nusselt number. The results show that stretching surface enhances the velocity and microrotation of micropolar fluid for both upper and lower fluids. It is also found that, lower fluid has a greater boundary layer thickness compared to upper fluid.

## ABSTRACT ARABIC

### خلاصة البحث


السائل القطبي الميكروسكوبي أو المايكروبولاري معروف لتطبيقاته العديدة، على سبيل المثال: في الدهانات، والدماء، والبلورات السائلة، وزيت السيليكون، والسوائل البشرية. يمكن تعريف هذا السائل على أنه سائل يحتوي على بنية مجهرية قادر على حل ظواهر السوائل المتضمنة لبنية مجهرية لا يمكن تفسيرها بواسطة معادلة نافير-ستوكس الكلاسيكية. من الناحية العملية هناك العديد من الحالات المتضمنة لسائلين بكثافتين مختلفتين، مثل تسرب المياه المالحة، وتدفق الهواء فوق الماء، والتسرب النفطي في الماء. على الرغم من أهمية هذا الموضوع فإن المؤلفات المتعلقة لا تزال محدودة، ولذلك هدفت هذه الدراسة إلى سد الفجوات البحثية. تم اعتبار اصطدام كثافة أخف للسائل الميكروبولاري بشكل متعامد مع سطح ممتد لسائل الميكروبولاري أعلى كثافة. لحل هذه المشكلة تم القيام بتحليل تحجيمي لنظام المعادلات الحاكمة اللابعدي المكون من الاستمرارية، والزخم، والزخم الزاوي، والطاقة وذلك لجعله نظاما لابعديا للمعادلات الحاكمة. بعدها تم استخدام تحويل التشابه للحصول على نظام معادلات تفاضلية عادية غير الخطية، وتم حلها بالرمزية باستخدام طريقة رانغ-كوتا-جيل. تم تنفيذ الخوارزميات ببرنامج جوبتر نوتبوك باستخدام لغة Python 3. كانت النتائج في اتفاق جيد جدا مع الأبحاث السابقة. النتائج العددية التي تم الحصول عليها هي: السرعة، ودرجة الحرارة الدقيقة، واحتكاك الجلد، ورقم نسلت (Nusselt). أظهرت النتائج أن تمديد السطح يعزز من السرعة والدوران الدقيق للسائل الميكروبولاري العلوي والسفلي، ووجد أيضًا أن السائل السفلي له طبقة حدية أكثر سماكة مقارنةً بالسائل العلوي.

## APPROVAL PAGE

I certify that I have supervised and read this study and that in my opinion, it conforms to acceptable standards of scholarly presentation and is fully adequate, in scope and quality, as a thesis for the degree of Master of Science (Computational & Theoretical Sciences)



.....  
Nurul Farahain Mohammad  
Supervisor



.....  
Nur Zatul Akmar Hamzah  
Co-Supervisor

I certify that I have read this study and that in my opinion it conforms to acceptable standards of scholarly presentation and is fully adequate, in scope and quality, as a thesis for the degree of Master of Science (Computational & Theoretical Sciences)



.....  
Nor Amirah Mohd Busul Aklan  
Internal Examiner

.....  
Ahmad Qushairi Mohamad  
External Examiner

This thesis was submitted to the Department of Computational & Theoretical Sciences and is accepted as a fulfilment of the requirement for the degree of Master of Science (Computational & Theoretical Sciences)



.....  
Siti Fatimah Zakaria  
Head, Department of  
Computational & Theoretical  
Sciences

This thesis was submitted to the Kulliyah of Science and is accepted as a fulfilment of the requirement for the degree of Master of Science


.....  
Jesni Shamsul Shaari  
Dean, Kulliyah of Science

## DECLARATION

I hereby declare that this thesis is the result of my own investigations, except where otherwise stated. I also declare that it has not been previously or concurrently submitted as a whole for any other degrees at IIUM or other institutions,

Nurazleen Binti Abdul Majid

Signature .....  ..... Date 11/8/2021 .....

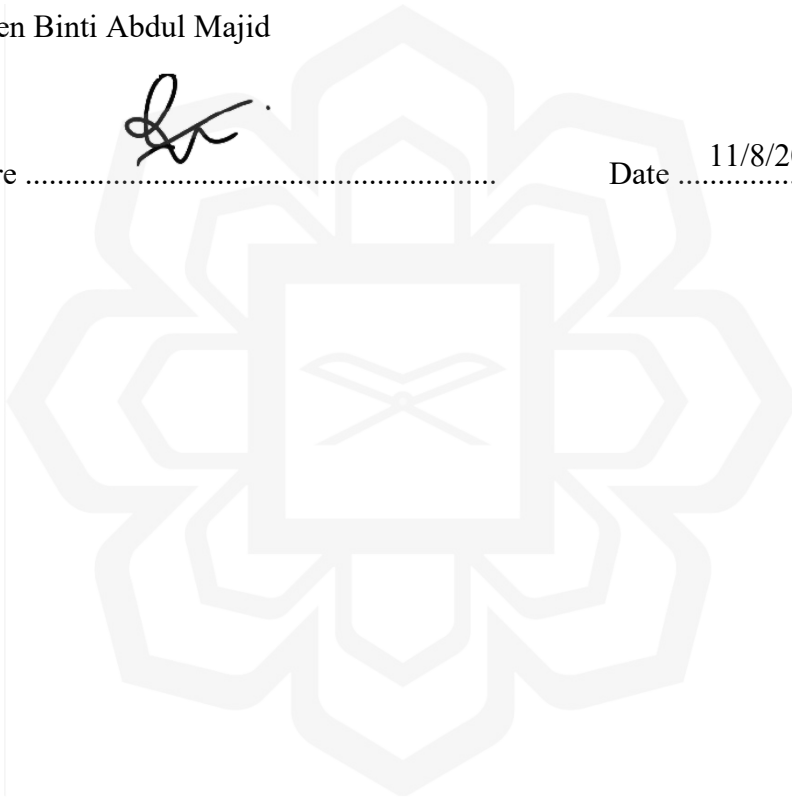

**INTERNATIONAL ISLAMIC UNIVERSITY MALAYSIA**

**DECLARATION OF COPYRIGHT AND AFFIRMATION OF  
FAIR USE OF UNPUBLISHED RESEARCH**

**CONVECTIVE FLOW OF MICROPOLAR FLUID OVER  
A FLAT SURFACE OF ANOTHER QUIESCENT FLUID**

I declare that the copyright holder of this thesis is Nurazleen Abdul Majid

Copyright ©2021 by Nurazleen Abdul Majid. All rights reserved.

No part of this unpublished research may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording or otherwise without prior written permission of the copyright holder except as provided below.

1. Any material contained in or derived from this unpublished research may be used by others in their writing with due acknowledgement.
2. IIUM or its library will have the right to make and transmit copies (print or electronic) for institutional and academic purposes.
3. The IIUM library will have the right to make, store in a retrieval system and supply copies of this unpublished research if requested by other universities and research libraries.

By signing this form, I acknowledged that I have read and understand the IIUM Intellectual Property Right and Commercialization policy.

Affirmed by Name of Student



.....  
Signature

11/8/2021

.....  
Date

## ACKNOWLEDGEMENT

Firstly, it is my utmost pleasure to dedicate this work to my supervisor and my family, who granted me the gift of their unwavering belief in my ability to accomplish this thesis: thank you for your support and patience.

I wish to express my appreciation and thanks to those who provided their time, effort and support for this project. To the members of my dissertation committee, thank you for sticking with me.



## TABLE OF CONTENTS

<b>Abstract.....</b>	<b>ii</b>
<b>Abstract in Arabic.....</b>	<b>iii</b>
<b>Approval page .....</b>	<b>iv</b>
<b>Declaration.....</b>	<b>v</b>
<b>Copyright Page.....</b>	<b>vii</b>
<b>Acknowledgement .....</b>	<b>vii</b>
<b>List of Tables .....</b>	<b>x</b>
<b>List of Figures.....</b>	<b>xvii</b>
<b>List of Symbols .....</b>	<b>xx</b>
<b>CHAPTER ONE : INTRODUCTION .....</b>	<b>1</b>
1.1 Introduction.....	1
1.2 Background of Study .....	1
1.3 Problem Statement .....	4
1.4 Research Objectives.....	5
1.5 Significance of Study.....	5
1.6 Research Methodology .....	6
1.7 Research Scope .....	8
1.8 Thesis Organization.....	8
<b>CHAPTER TWO: LITERATURE REVIEW.....</b>	<b>10</b>
2.1 Introduction.....	10
2.2 Micropolar Fluid Flow over Stretching Surface.....	10
2.3 Micropolar Fluid Flow of Another Quiescent Fluid.....	11
2.4 Forced Convection Flow of Micropolar Fluid over a Stretching Surface .....	12
2.5 Free Convection Flow of Micropolar Fluid over Stretching Surface.....	14
2.6 Mixed Convection Flow of Micropolar Fluid over a Stretching Surface .....	15
2.7 Mixed Convection Flow of Micropolar Fluid over a Permeable Stretching Surface .....	16
<b>CHAPTER THREE: DERIVATION OF GOVERNING EQUATION .....</b>	<b>18</b>
3.1 Introduction.....	18
3.2 Governing Equations of Forced Convective Flow of Micropolar Fluid.....	18
3.3 Scaling Analysis .....	21
3.4 Summary.....	25
<b>CHAPTER FOUR: FORCED CONVECTION OF MICROPOLAR FLUID OVER STRETCHING SURFACE OF ANOTHER QUIESCENT FLUID .....</b>	<b>27</b>
4.1 Introduction.....	27

4.2 Mathematical Modelling.....	27
4.3 Physical Quantities .....	30
4.4 Solution Procedure.....	31
4.5 Results And Discussion .....	32
4.5.1 Constant Wall Temperature .....	33
4.5.2 Constant Heat Flux.....	42
4.6 Summary.....	47
<b>CHAPTER FIVE: FREE CONVECTION OF MICROPOLAR FLUID OVER A STRETCHING SURFACE OF ANOTHER QUIESCENT FLUID .....</b>	<b>49</b>
5.1 Introduction.....	49
5.2 Mathematical Modeling.....	49
5.3 Results and Discussion .....	50
5.3.1 Constant Wall Temperature .....	51
5.3.2 Constant Heat Flux.....	64
5.4 Summary.....	67
<b>CHAPTER SIX: MIXED CONVECTION OF MICROPOLAR FLUID OVER STRETCHING SURFACE OF ANOTHER QUIESCENT FLUID.....</b>	<b>71</b>
6.1 Introduction.....	71
6.2 Mathematical Model.....	71
6.3 Results And discussion .....	72
6.3.1 Constant Wall Temperature .....	73
6.3.2 Constant Heat Flux.....	97
6.4 Summary.....	100
<b>CHAPTER SEVEN: MIXED CONVECTION OF MICROPOLAR FLUID OVER A PERMEABLE STRETCHING SURFACE.....</b>	<b>103</b>
7.1 Introduction.....	103
7.2 Mathematical Model.....	103
7.3 Results And Discussion .....	104
7.3.1 Constant Wall Temperature .....	105
7.3.2 Constant Heat Flux.....	128
7.4 Summary.....	150
<b>CHAPTER EIGHT: CONCLUSION .....</b>	<b>153</b>
8.1 Introduction.....	153
8.2 Summary of Thesis .....	153
8.3 Suggestion & Recommendation .....	154
<b>REFERENCES.....</b>	<b>156</b>
APPENDIX A: PYHTON PROGRAMMING SCRIPT.....	158
APPENDIX B: PUBLICATIONS .....	171

## LIST OF TABLES

Table 3.1	Order of magnitude for momentum equations	22
Table 3.2	Order of magnitude for angular momentum equation	24
Table 3.3	Order of magnitude for energy equation	25
Table 4.1	Comparison of $f''(0)$ for various $\lambda$ when $K = 0$ and $Pr = 1$	35
Table 4.2	The values of skin friction coefficient & Nusselt number with variation of $K$ when $Pr = 7$ and $\lambda = 0.5$	36
Table 4.3	The skin friction coefficient & Nusselt number of upper & lower fluid with various $Pr$ number when $K = 1$ and $\lambda = 0.5$	37
Table 4.4	Skin friction coefficient and Nusselt number of upper and lower fluid with various $\lambda$ , when $K = 1$ and $Pr = 7$	39
Table 4.5	A comparison of temperature at surface $\theta(0)$ when $K = 0$ and $\lambda = 0$	41
Table 4.6	Skin friction coefficient and Nusselt number with variation of $K$ when $Pr = 7$ and $\lambda = 0.5$	41
Table 4.7	Skin friction coefficient & Nusselt number of upper and lower fluid with various number when $K = 1$ and $\lambda = 0.5$	43
Table 4.8	Skin friction coefficient and Nusselt number of upper and lower fluid with various $\lambda$ , when $K = 1$ and $Pr = 7$	47
Table 4.9	Summary of present results for	48

	forced convection of micropolar fluid flow over a stretching surface of another quiescent fluid (CWT)	
Table 4.10	Summary of present results for forced convection of micropolar fluid flow over a stretching surface of another quiescent Fluid (CHF)	48
Table 5.1	Comparison of $f''(0)$ for various $\lambda$ when $K = 1$ , $Gr = 0$ and $Pr = 1$	51
Table 5.2	Skin friction coefficient and Nusselt number at surface of upper fluid and lower fluid when various $K$ with $Pr = 7$ , $\lambda = 0.5$ and $Gr = 5$	52
Table 5.3	Skin friction coefficient and Nusselt number of upper and lower fluid with various $Pr$ number when $K = 1$ , $Gr = 5$ and $\lambda = 0.5$	53
Table 5.4	Skin friction coefficient and Nusselt number of upper and lower fluid with various $\lambda$ when $K = 1$ , $Gr = 5$ and $Pr = 7$	57
Table 5.5	Skin friction coefficient and Nusselt number for different $Gr$ when $K = 1$ , $Pr = 7$ and $\lambda = 0.5$	57
Table 5.6	A comparison of temperature at surface $\theta(0)$ when $K = 0$ and $\lambda = 0$	59
Table 5.7	Skin friction & Nusselt number with different $K$ when $Pr = 7$ , $\lambda = 0.5$ and $Gr = 5$	61
Table 5.8	The values of skin friction and Nusselt number of upper and lower fluid with different $Pr$ when $K = 1$ , $\lambda = 0.5$ and $Gr = 5$	62
Table 5.9	Skin friction coefficient and Nusselt number of upper and lower fluid with different $\lambda$ when $K = 1$ , $Pr = 7$ and $Gr = 5$	64
Table	Skin friction coefficient and Nusselt	65

5.10	number of upper and lower fluid with difference $Gr$ when $K = 1, Pr = 7$ and $\lambda = 0.5$	
Table 5.11	Summary of present results for free convection of micropolar fluid flow over a stretching surface of another quiescent fluid (CWT)	70
Table 5.12	Summary of present results for free convection of micropolar fluid flow over a stretching surface of another quiescent fluid (CHF)	70
Table 6.1	Values of $f''(0)$ for various $\lambda$ when $K = 0, Pr = 1$ and $Ri = 0$	72
Table 6.2	Effect of $K$ on skin friction coefficient and Nusselt number when $Pr = 7, \lambda = 0.5$ and $Ri = 1$	75
Table 6.3	Skin friction coefficient and Nusselt number of upper and lower fluid when various $K$ with $Pr = 7, \lambda = 0.5$ and $Ri = -1$	76
Table 6.4	The values of skin friction coefficient and Nusselt number of upper and lower fluid under various $Pr$ when $K = 1, \lambda = 0.5$ and $Ri = 1$	79
Table 6.5	Skin friction coefficient and Nusselt number of upper and lower fluids when various $Pr$ when $K = 1, \lambda = 0.5$ and $Ri = -1$	81
Table 6.6	Skin friction coefficient and Nusselt number of upper and lower fluids under various $\lambda$ when $K = 1, Pr = 7$ and $Ri = 1$	82
Table 6.7	Skin friction coefficient and Nusselt number of upper and lower fluids under various $\lambda$ when $K = 1, Pr = 7$ and $Ri = -1$	83
Table 6.8	A comparison of temperature at surface $\theta(0)$ when $K = 0, \lambda = 0$ and $Ri = 0$	86

Table 6.9	The skin friction coefficient and Nusselt number of upper and lower fluid for various micropolar parameter $K$ when $Pr = 7$ , $\lambda = 0.5$ and $Ri = 1$	87
Table 6.10	The skin friction coefficient and Nusselt number of upper and lower fluids for various micropolar parameter $K$ when $Pr = 7$ , $\lambda = 0.5$ and $Ri = -1$	88
Table 6.11	The values of skin friction coefficient and Nusselt number for various $Pr$ number when $K = 1$ , $\lambda = 0.5$ and $Ri = 1$	95
Table 6.12	Skin friction coefficient and Nusselt number for upper and lower fluids when $Pr$ is various with $K = 1$ , $\lambda = 0.5$ and $Ri = -1$	97
Table 6.13	Skin friction and Nusselt number of upper and lower fluids for various $\lambda$ when $K = 1$ , $Pr = 7$ , and $Ri = 1$	97
Table 6.14	The values of skin friction and Nusselt number of upper and lower fluids for various $\lambda$ when $K = 1$ , $Pr = 7$ and $Ri = -1$	97
Table 6.15	Summary of present results for mixed convection of micropolar fluid flow over a stretching surface of another quiescent fluid for CWT boundary condition (Assisting Flow)	101
Table 6.16	Summary of present results for mixed convection of micropolar fluid flow over a stretching surface of another quiescent fluid for CHF boundary condition (Assisting Flow)	101
Table 6.17	Summary of present results for mixed convection of micropolar fluid flow over a stretching surface of	102

another quiescent fluid for CWT boundary condition (Opposing Flow)

Table 6.18	Summary of present results for mixed convection of micropolar fluid flow over a stretching surface of another quiescent fluid for CHF boundary condition (Opposing Flow)	102
Table 7.1	Values of $f''(0)$ for various of $\lambda$ when $K = 0, Pr = 1$ and $Ri = 1$	103
Table 7.2	Skin friction coefficient and Nusselt number when $Pr = 7, \lambda = 0.5, \alpha = \beta = 3$ and $Ri = 1$	106
Table 7.3	Skin friction coefficient and Nusselt number of upper and lower fluids when various $K$ with $Pr = 7, \lambda = 0.5, \alpha = \beta = 3$ and $Ri = 1$	107
Table 7.4	Skin friction coefficient and Nusselt number of upper and lower fluids under various $Pr$ when $K = 1, \lambda = 0.5$ and $Ri = 1$	111
Table 7.5	Skin friction coefficient and Nusselt number of upper and lower fluids under various $Pr$ when $K = 1, \lambda = 0.5, \alpha = \beta = 3$ and $Ri = -1$	113
Table 7.6	Skin friction coefficient and Nusselt number of upper and lower fluid when various $\lambda$ when $K = 1, Pr = 7$ and $Ri = 1$	117
Table 7.7	Skin friction coefficient and Nusselt number of upper and lower fluids under various $\lambda$ when $K = 1, Pr = 7$ and $Ri = -1$	118
Table 7.8	Skin friction coefficient and Nusselt number of upper and lower fluids when $\alpha < \beta$ with $K = 1, Pr = 7, \lambda = 0.5$ and $Ri = 1$	119

Table 7.9	Skin friction coefficient and Nusselt number of upper and lower fluids when $\alpha < \beta$ with $K = 1, Pr = 7, \lambda = 0.5$ and $Ri = -1$	122
Table 7.10	Skin friction coefficient and Nusselt number of upper and lower fluids when $\alpha > \beta$ with $K = 1, Pr = 7, \lambda = 0.5$ and $Ri = 1$	124
Table 7.11	Skin friction coefficient and Nusselt number of upper and lower fluids when $\alpha > \beta$ with and $K = 1, Pr=7, \lambda = 0.5$ and $Ri= -1$	126
Table 7.12	Skin friction coefficient and Nusselt number for various $K$ when $Pr=7, \lambda = 0.5, \alpha=\beta=3$ and $Ri = 1$	130
Table 7.13	The skin friction coefficient and Nusselt number for various $K$ when $Pr = 7, \lambda = 0.5, \alpha=\beta=3$ and $Ri = -1$	135
Table 7.14	The values of skin friction and Nusselt number of upper & lower fluids when pr is various with $K = 1, \lambda = 1, \alpha = \beta = 3$ and $Ri = 1$	135
Table 7.15	The values of skin friction coefficient and Nusselt number for various Pr number when $K = 1, \lambda = 0.5, \alpha = \beta = 3$ and $Ri = -1$	138
Table 7.16	The impact of $\lambda$ on skin friction coefficient and Nusselt number $K = 1, \lambda = 0.5, \alpha = \beta = 3, Pr = 7$ and $Ri = -1$	139
Table 7.17	The values of skin friction and Nusselt number for various $\lambda$ when $K = 1, Pr = 7, \alpha = \beta = 3$ and $Ri = -1$	141
Table	The values of skin friction	142

7.18	coefficient and Nusselt number when $\alpha < \beta$ with $K = 1$ , $Pr = 7$ , $\lambda = 0.5$ and $Ri = -1$	
Table 7.19	The values of skin friction coefficient and Nusselt number when $K = 1$ , $Pr = 7$ , $\lambda = 0.5$ and $Ri = -1$	142
Table 7.20	The values of skin friction coefficient and Nusselt number for upper and lower fluids for $\alpha > \beta$ when $K = 1$ , $Pr = 7$ , $\lambda = 0.5$ and $Ri = 1$	145
Table 7.21	Skin friction coefficient and Nusselt number for $\alpha > \beta$ when $K = 1$ , $Pr = 7$ , $\lambda = 0.5$ and $Ri = -1$	146
Table 7.22	Summary of mixed convection of micropolar fluid flow over a permeable stretching surface of another quiescent fluid with constant wall temperature boundary condition (Assisting flow)	151
Table 7.23	Summary of mixed convection of micropolar fluid flow over a permeable stretching surface of another quiescent fluid with constant heat flux boundary condition (Assisting flow)	151
Table 7.24	Summary of mixed convection of micropolar fluid flow over a permeable stretching surface of another quiescent fluid for cwt boundary condition (Opposing flow)	152
Table 7.25	Summary of mixed convection of micropolar fluid flow over a permeable stretching surface of another quiescent fluid for CHF boundary condition (Opposing flow)	152

## LIST OF FIGURES

Figure 1.1	Research Flowchart	7
Figure 3.1	Physical Coordinate	19
Figure 4.1	Flowchart of Shooting Method with Runge Kutta-Gill	33
Figure 4.2	The Effect of $K$ when $Pr = 7$ and $\lambda = 0.5$	35
Figure 4.3	The Effect of $Pr$ Number on when $K = 1$ and $\lambda = 0.5$	37
Figure 4.4	The Impact of Different Value of $\lambda$ when $K = 1$ and $Pr = 7$	40
Figure 4.5	The Effect of $K$ when $Pr = 7$ and $\lambda = 0.5$	43
Figure 4.6	The Effect of Different Value of $Pr$ Number when $K = 1$ and $\lambda = 0.5$	44
Figure 4.7	The Effect of Different Value of $\lambda$ when $K = 1$ and $Pr = 7$	46
Figure 4.8	The Effect of $\lambda$ when $K = 1$ and $Pr = 7$	46
Figure 5.1	The Effect of $K$ when $Pr = 7$ , $\lambda = 0.5$ and $Gr = 5$	53
Figure 5.2	The Impact of $Pr$ when $K = 1$ , $\lambda = 0.5$ and $Gr = 5$	54
Figure 5.3	The Effect of Different $\lambda$ when $K = 1$ , $Pr = 7$ and $Gr = 5$	55
Figure 5.4	The Impact of $Gr$ when $K = 1$ , $Pr = 7$ and $\lambda = 0.5$	60
Figure 5.5	The Effect of $K$ when $Pr = 7$ , $\lambda = 0.5$ and $Gr = 5$	61
Figure 5.6	The Effect of $Pr$ when $K = 1$ , $\lambda = 0.5$ and $Gr = 5$	65
Figure 5.7	The Effect of $\lambda$ when $K = 1$ , $Pr = 7$ and $Gr = 5$	66
Figure 5.8	The Effect of $Gr$ when $K = 1$ , $Pr = 7$ and $\lambda = 0.5$	67
Figure 6.1	The Effect of $K$ when $Pr = 7$ , $\lambda = 0.5$ and $Ri = 1$	73
Figure 6.2	The Effect of $K$ when $Pr = 7$ , $\lambda = 0.5$ and $Ri = -1$	76

Figure 6.3	The Effect of Pr when $K = 1, \lambda = 0.5$ and $Ri = 1$	77
Figure 6.4	The Effect of Pr when $K = 1, \lambda = 0.5$ and $Ri = -1$	79
Figure 6.5	The Effect of $\lambda$ when $K = 1, Pr = 7$ and $Ri = 1$	83
Figure 6.6	The Effect of $\lambda$ when $K = 1, Pr = 7$ and $Ri = -1$	84
Figure 6.7	The Effect of $K$ when $Pr = 7, \lambda = 0.5$ and $Ri = 1$	88
Figure 6.8	The Effect of $K$ when $Pr = 7, \lambda = 0.5$ and $Ri = -1$	89
Figure 6.9	The Effect of Pr number when $K = 1, \lambda = 0.5$ and $Ri = 1$	92
Figure 6.10	The Effect of Pr number when $K = 1, \lambda = 0.5$ and $Ri = -1$	93
Figure 6.11	The Effect of $\lambda$ when $K = 1, Pr = 7$ and $Ri = 1$	97
Figure 6.12	The Effect of $\lambda$ when $K = 1, Pr = 7$ and $Ri = -1$	98
Figure 7.1	The Effect of $K$ when $Pr = 7, \lambda = 0.5, \alpha = \beta = 3$ and $Ri = 1$	107
Figure 7.2	The Effect of $K$ when $Pr = 7, \lambda = 0.5, \alpha = \beta = 3$ and $Ri = -1$	108
Figure 7.3	The Effect of $Pr = 7$ when $K = 1, \lambda = 0.5, \alpha = \beta = 3$ and $Ri = 1$	110
Figure 7.4	The Effect of $Pr = 7$ when $K = 1, \lambda = 0.5, \alpha = \beta = 3$ and $Ri = -1$	113
Figure 7.5	The Effect of $\lambda$ when $K = 1, Pr = 7, \alpha = \beta = 3$ and $Ri = 1$	114
Figure 7.6	The Effect of $\lambda$ when $K = 1, Pr = 7, \alpha = \beta = 3$ and $Ri = -1$	119
Figure 7.7	The Effect of $\alpha < \beta$ when $K = 1, Pr = 7, \lambda = 0.5$ and $Ri = 1$	120
Figure 7.8	The Effect of $\alpha < \beta$ when $K = 1, Pr = 7, \lambda = 0.5$ and $Ri = -1$	122
Figure 7.9	The Effect of $\alpha > \beta$ when $K = 1, Pr = 7, \lambda = 0.5$ and $Ri = 1$	124

Figure 7.10	The Effect of $\alpha > \beta$ when $K = 1, Pr = 7, \lambda = 0.5$ and $Ri = -1$	126
Figure 7.11	The Impact of $K$ when $Pr = 7, \lambda = 0.5, \alpha = \beta = 3$ and $Ri = 1$	128
Figure 7.12	The Effect of $K$ when $Pr = 7, \lambda = 0.5, \alpha = \beta = 3$ and $Ri = -1$	130
Figure 7.13	The Impact of $Pr$ number when $K = 1, \lambda = 0.5, \alpha = \beta = 3$ and $Ri = 1$	132
Figure 7.14	The Effect of $Pr$ Number when $K = 1, \lambda = 0.5, \alpha = \beta = 3$ and $Ri = -1$	133
Figure 7.15	The Impact of $\lambda$ when $K = 1, Pr = 7, \alpha = \beta = 3$ and $Ri = 1$	139
Figure 7.16	The Effect of $\lambda$ when $K = 1, Pr = 7, \alpha = \beta = 3$ and $Ri = -1$	140
Figure 7.17	The Impact of $\alpha < \beta$ when $K = 1, Pr = 7, \lambda = 0.5$ and $Ri = 1$	143
Figure 7.18	The Impact of $\alpha < \beta$ when $K = 1, Pr = 7, \lambda = 0.5$ and $Ri = -1$	147
Figure 7.19	The Impact of $\alpha > \beta$ when $K = 1, Pr = 7, \lambda = 0.5$ and $Ri = 1$	148
Figure 7.20	The Effect of $\alpha > \beta$ when $K = 1, Pr = 7, \lambda = 0.5$ and $Ri = -1$	149

## LIST OF SYMBOLS

$a$	Constant
$c$	Constant
Gr	Grashof number
$j$	Microinertia density
$k$	Thermal conductivity
$K$	Micropolar parameter
$n$	Concentration
$N$	Microrotation
Pr	Prandtl number
Ri	Richardson number
$T$	Temperature
$u$	Velocity of fluid along $x$ -axis
$v$	Velocity of fluid along $y$ -axis
$\alpha$	Suction parameter for upper fluid
$\beta$	Suction parameter for lower fluid
$\gamma$	Spin gradient viscosity
$\kappa$	Vortex viscosity
$\rho$	Density of micropolar fluid
$\mu$	Dynamic viscosity
$\nu$	Kinematic viscosity

$i$	Type of fluid
$w$	Surface
$\infty$	Free stream
1	Upper fluid
2	Lower fluid



# **CHAPTER ONE**

## **INTRODUCTION**

### **1.1 INTRODUCTION**

In this chapter, the overview of this thesis is presented. The background of the study is discussed in section 1.2. The statement of problem and research objectives are explained in sections 1.3 and 1.4 respectively. Following by scope of research as well as the significance of the study in sections 1.5 and 1.6. Meanwhile, section 1.7 presents the research methodology. Lastly, the thesis organization is explained in section 1.8.

### **1.2 BACKGROUND OF STUDY**

Fluid is among the most important element in our world. The significance of fluid in life can be seen such as air, water, blood, oil, cloud, smoke and etc. Almost everything in this world relates to the fluid. Throughout history, it can be seen that when humans recognize fluid we can do much more to our civilization. Scientists began to develop an interest to investigate more about fluid and later define fluid as a liquid or gases that react toward a shear force (Pritchard & Leylegian, 2011). Besides, fluid consists of the substance that deforms and change according to the shape (Kambe, 2007). An area of the field that studies fluids at rest or in motion is called fluid mechanics which has been applied to the human body, dam systems, automobile industry, large scale wind turbines, energy generator and many more (Pritchard & Leylegian, 2011).

Fluid becomes interesting when it flows on a surface or toward something. The phenomena of fluid flow can be understood as a mass motion involving continuous

deformation (Kambe, 2007). Examples of fluid flow are wind, river, blood flow, respiratory air, sea current, solar wind etc. In fluid mechanics, the fluid flow can be categorized into several types. First is internal versus external flow that depends on the boundaries of the fluid flow. Second, compressible versus incompressible flow where the flow is determined by the condition of fluid's density. Third is laminar versus turbulent flow that indicated by how smooth or chaotic the flow is. The fourth is whether the fluid flow is by natural causes or by force. Another important type of flow is steady versus unsteady. This flow is known as steady if there is no change at a point with time. Otherwise, it is called unsteady. All the analysis of fluid will be based on the conservation of mass, Newton's second law of motion, the principle of angular momentum, the first law of thermodynamics and the second law of thermodynamics.

One of the important characteristics of fluid is the viscosity which can be understood as the rate of deformation of fluid. Viscosity also can be used to determine the internal stickiness of the fluid. This attribute becomes the indicator toward a classification of fluid into Newtonian and non-Newtonian fluids. The Newtonian fluid is a fluid that obeys Newton's law of viscosity where the shear stress is directly proportional to the rate of deformation and is governed by the Navier – Stokes equation. On the contrary, the relationship between the rate of deformation and shear stress for non-Newtonian fluid is not linear thus fluid does not obey Newtonian's law of viscosity. For example, honey, blood, molten plastic, liquid crystal and polymeric liquids are a part of the non-Newtonian fluid that we are dealing with in everyday life. In research, non-Newtonian fluid is categorized as Casson fluid, Jeffery fluid, nanofluid, viscoelastic fluid, micropolar fluid and many more. The rheology of non-Newtonian fluid is very interesting that leads numerous researches continue to investigate it.

In this thesis, the type of non-Newtonian fluid considered is the micropolar fluid which be a subclass of microfluid. The micropolar fluid concept initiated by Eringen (1965) which become attention to the researchers for the past few decades due to the many applications to the industry such as paints, blood, body fluid, polymers, colloidal fluids and suspension fluid (Ishak et al., 2007). Very recently, micropolar fluid is also used as a model for sliding hiatus hernia (Chandra & Kumar Pandey, 2018) and stenosed artery (Haghighi, et al., 2019). This theory explained that micropolar fluid displays microrotational effect and microrotational inertia. Besides, it can support couple stress and body couple. In order to solve the problem related to micropolar fluid, an extra equation named as angular momentum equation must be added in the governing equation. More details about the mechanics of micropolar fluid can be referred in Ariman et al. (1973), Ariman et al. (1974), Willson (1970), Lukaszewicz (1999) and Eremeyev et al. (2013).

Flows over stretched surfaces have various engineering and industrial applications like the extrusion of plastic sheets, extraction of polymer, glass blowing, drawing of wires, paper production and rubber sheets. It is important to know the flow properties of the ambient fluid, speed of collection and the rate of heat transfer at the stretching surface since the production of a quality product depends on it. The research regarding fluid flow over the moving surface was initiated by Sakiadis (1961) and Crane (1970) extended to linearly stretched plate. Many other researchers begin their interest in this topic such as Sankara and Watson (1985) as well as Na and Pop (1997). More fundamental and important facts about the stretching surface can be found in a book written by Mehmood (2017).

In addition, according to Gupta (2014), heat convection can be divided into free convection and forced convection. The convective effect present when the